BUS SHELTERS · EGUN LINE

Egun Shelter, 3 m

EGMA003A



+200 RAL

The Egun shelter is defined by its curved frame that closes one of its sides — a continuous line joining the roof and the support structure, giving it a lightweight and protective appearance. 3-metre-long model, 1600 mm deep and 2600 mm high. Structure of 120 × 80 × 3 mm rectangular steel posts with Marine anti-corrosion treatment and a 300 mm radius of curvature on the left side, steel upper crossbar, translucent cellular alveolar polycarbonate roof with anti-UV treatment, and 8 mm tempered safety glass enclosures with a safety stripe. Compatible with a leaning rail, seat, and MUPI.

REFERENCE	EGMA003A
OVERALL DIMENSIONS	3,000 × 1,600 × 2,600 mm length × depth × height
MATERIALS	Steel
COLOUR	Over 200 JomaColor RAL colours, or uncoated
DESIGN	Joma

+15 years
WARRANTY
15 on wood and powder coating · lifetime against rust

C5
JOMA MARINE™
C5 · EN ISO 12944-2:2017

1000 h
SALT SPRAY
UNE-EN ISO 9227 · UNE-EN 13724


+200 RAL
JOMACOLOR
Or uncoated

Spare parts
WITH NO TIME LIMIT

Legutio
MADE IN
Araba

FOR SPECIFIERS

Drawings · EGMA003A

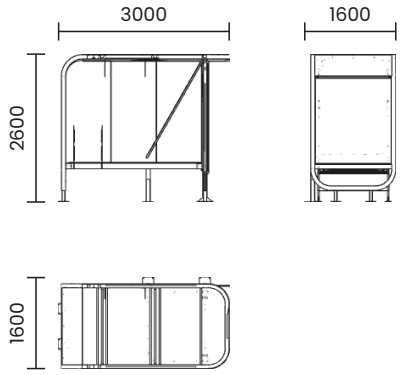

Dimensions in mm. Elevation, side view and plan taken from the 3D model. CAD drawing and 3D model available on the product page at jomaurban.com.

TENDER TEXT · EGMA003A

Egun bus shelter, reference EGMA003A, by Joma Urban, 3 metres wide, comprising a structure of rectangular steel posts with Marine anticorrosion treatment, 120 x 80 x 3mm, with a radius of curvature of 300mm on the left-hand side, upper rectangular steel crossbeam with Marine anticorrosion treatment, translucent multi-wall cellular polycarbonate roof with anti-UV treatment and 8mm toughened safety glass with safety strip. Option to include an ischial support or seat, and MUPI (street information panel).

The Egun line



EGMA003A · This sheet
Egun Shelter, 3 m · 3,000 × 1,600 × 2,600 mm



EGMA004A
Egun Shelter, 4 m · 4,000 × 1,600 × 2,600 mm

Materials and finishes

Joma Marine™ steel

Four-phase treatment: cleaning and dip pre-treatment, cataphoresis, zinc-rich primer and powder coating. Corrosion class C5 (EN ISO 12944-2:2017) and over 1000 h of salt spray (UNE-EN ISO 9227); it also passes UNE-EN 13724. Lifetime warranty against rust.

JomaColor

Metal parts are powder coated in any of the over 200 JomaColor RAL colours. Every metal reference can also be ordered uncoated. We send physical colour samples on request.

Designed for its whole life cycle

Durable materials and lifetime spare parts: lower cost over the whole service life.

Over 15 years of warranty — 15 years on wood and powder coating. Lifetime warranty against rust.

José María Gallastegui y Cía., S.A.
San Bartolomé 11, Pol. Ind. Goiain · 01170 Legutio (Araba)
+34 945 31 87 70 · jomaurban.com/en/products/egun-3000-shelter
ISO 9001:2015 quality management system